ORIGINS LIVING®

INSTALLATION INSTRUCTIONS FOR ILLUMINATED MIRRORS

This product must be connected to a 30 mA RCD-protected circuit in accordance with local electrical regulations. Installation must be carried out by a qualified electrician. If installing in a bathroom, it is important to install electrical fittings in the correct bathroom zone. This item can safely be fitted in Zone 2.

1. Ensure the electrical circuit to which the mirror will be connected is isolated and switched off at the consumer unit (fuse box).

2. Unpack the mirror, place it on a soft surface, such as cardboard or a towel. Do not place the mirror on objects with hard surfaces.

3. Measure the fixing distances on the back of the mirror and mark the fixing positions on the wall to the required height position and correct level.

4. Before drilling, ensure there are no hidden pipes or cables behind mounting points.

5. Carefully drill the marked positions on the wall and insert the wall plugs and fixings into the new holes. Ensure that the correct size drill bit is used.

6. Connect the cable from the mirror to the 240V/50Hz mains supply according to the wiring diagram below. Please note that this mirror is a Class II (double-insulated) electrical appliance and must not be connected to an earth (ground) wire. If the supply cable includes an earth conductor, it must be terminated in an insulated connector block and must not be connected to the mirror. Any electrical connections made inside the bathroom must be enclosed in a suitable IP-rated junction box (IP44 or higher) in accordance with local regulations.

7. Carefully hang the mirror on the wall fixings and check it is securely supported and level before restoring power.

WIRING DIAGRAM

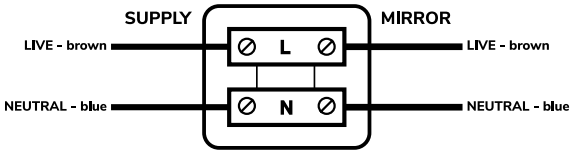

Class II

CARE INSTRUCTIONS

Never use abrasives, bleach, solvents, descaling products or acids when cleaning the mirror.

Carefully clean the mirror using a soft, damp or microfibre cloth. For larger stains use good quality, readily available non-aggressive glass and mirror cleaning agents. The mirror should then be dried with a soft dry cloth. The back of the mirror should only be cleaned with a soft dry cloth without any cleaning agents to avoid the silver layer from corroding.